



duo'fuse®

i-WOOD
Wood Works

decking
fences

DECKING

Duofuse® is a high-quality and low-maintenance decking range.

Duofuse® composite decking offers a lasting beautiful and extremely durable alternative to wooden decking, among other things. They stylishly decorate your garden in the form of a beautiful and natural-looking terrace, but you can also use them to make steps for level differences, build bridges or as a classy and safe anti-slip walking surface around your swimming pool.

Duofuse® wood composite is composed of a mix of wood flour and plastic. This gives it the warmth and look of wood combined with the advantages of plastic.

Duofuse® products are developed and produced from raw material to finished product in Belgium.



DFD1E62 Wenge Brown

made in Belgium



DFDE 162 Graphite Black

advantages wood composite



Easy to install



Maintenance-friendly
no more oiling



Environmentally friendly and recyclable



Non-slippery, brushed surface



Does not rot or splinter



DFDE162 Graphite Black



DFDE162 Wenge Brown

hollow & solid decking board

The quality of wood composite (abbreviated HKC or WPC) is determined by its composition. The quality of the plastic is therefore essential.

Due to the type and quality of the plastic used in Duofuse®, we are the only one able to make a truly high-quality hollow decking board. The advantage of a Duofuse® hollow board is that it is lighter in weight.



This makes it ideal in combination with the Duofuse® aluminium substructure system in situations such as balconies and roof terraces.

The advantage of the solid Duofuse® decking boards are the even better technical characteristics, including the higher fire reaction class.

DFDE162 Graphite Black

DFD162

The DFD162 is a hollow board measuring 4 m long, 162 mm wide and 28 mm thick. It can be used on both sides. One side is fine grooved and the other side is wide grooved.

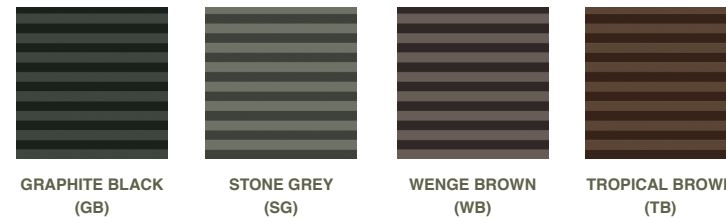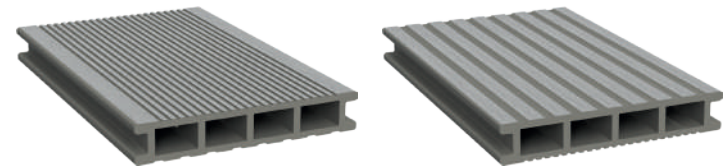



DFD162 Wenge Brown



DFDE162

The DFDE162 is a hollow board measuring 4 m long, 162 mm wide and 28 mm thick. It can be used on both sides.

One side has a brushed appearance and the other side has a woodgrain texture.

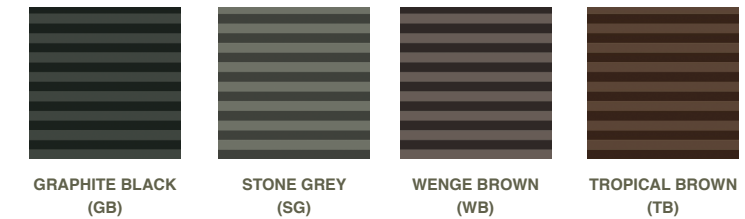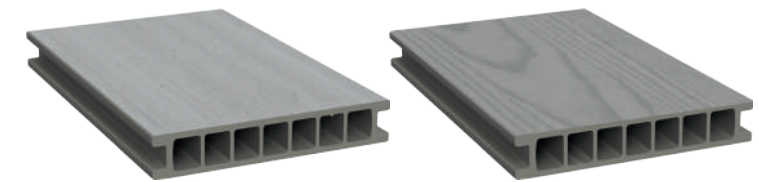


DFDE162 Graphite Black




DFDF162

The DFDF162 is a hollow wood composite board with a foil featuring a photorealistic wood print. This board has a length of 4 m, a width of 162 mm, and a thickness of 28 mm.

The boards are produced approximately 4 cm longer so that the ends can be cut off if desired, in order to achieve a clean and smooth finish.




SILVER TEAK
(ST)




RECLAIMED OAK
(RO)



AMBER OAK
(AO)




SIENNA OAK
(SO)



MIDNIGHT OAK
(MO)

DFDF162 Amber Oak

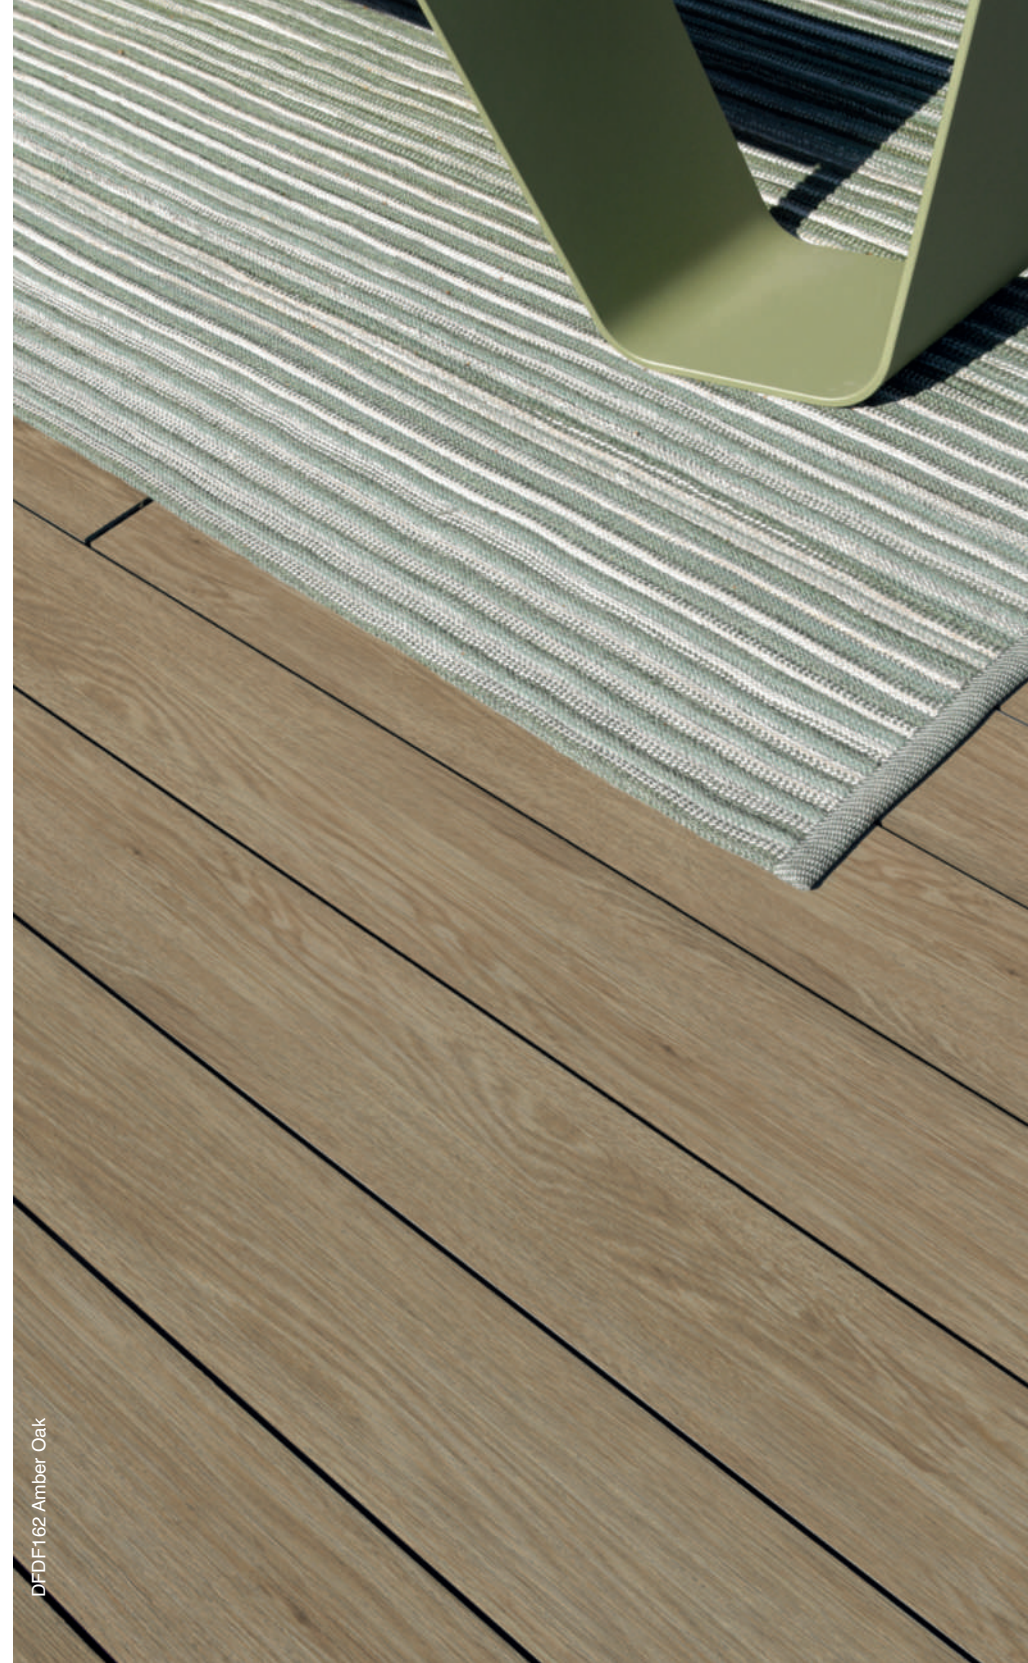

DFDF162 Reclaimed Oak



1



1



3




4



5



6

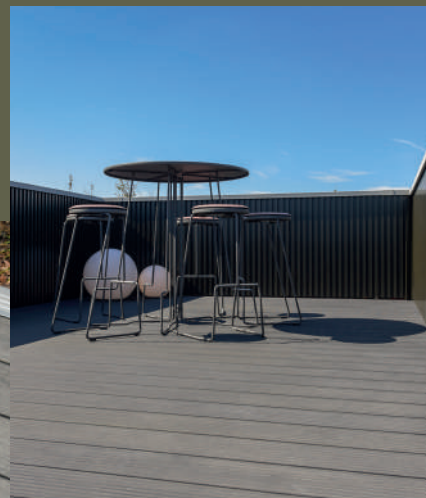

7



8



1: DFDE162 Wenge Brown
 2: DFD162 Wenge Brown
 3: DFDE162 Wenge Brown
 4: DFDE162 Graphite Black

5: DFD162 Wenge Brown
 6: DFDE162 Graphite Black
 7: DFDE140 Graphite Black
 8: DFDE162 Stone Grey

DFDS162

The DFDS162 is a solid board with filled core. The decking board has a length of 4 m , 162 mm wide and 28 mm thick.

It can be used on both sides. One side has a brushed texture and the other side has fine grooved texture.

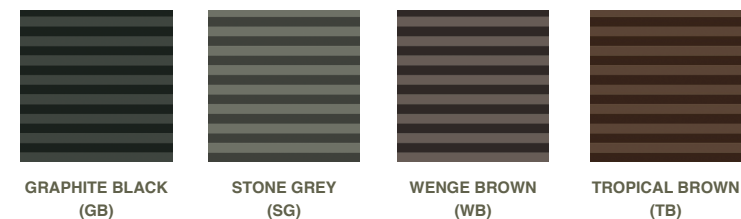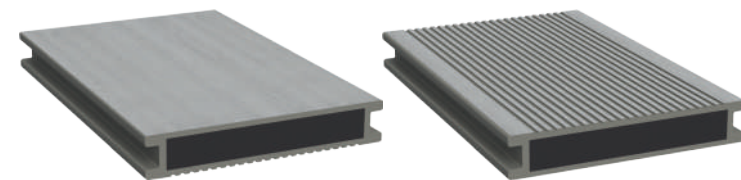



DFDS162 Wenge Brown



DFDE140

The DFDE140 is a full solid board measuring 4 m long, 140 mm wide and 23 mm thick. It can be used on both sides.

One side has a fine grooved texture and the other side has a wood grain texture.

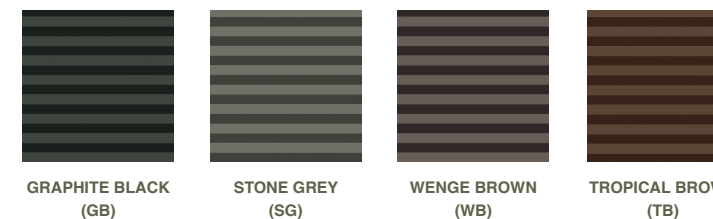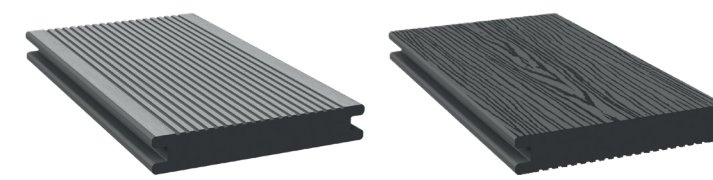

DFDE140 Graphite Black





substructure

The Duofuse® deck boards can be fixed to the Duofuse® PVC underlay and to wood using the stainless steel clips. In addition, the unique aluminium sub-structure system is available which offers many advantages.

aluminium substructure


The aluminium substructure system ensures easy and quick installation of the Duofuse® wood composite deck boards.

guaranteed time savings on assembly

The Duofuse® aluminium substructure system saves at least 50% time compared to traditionally bolted systems.


ideal for floating constructions

This system is ideally suited for applications where the substructure needs to be suspended.

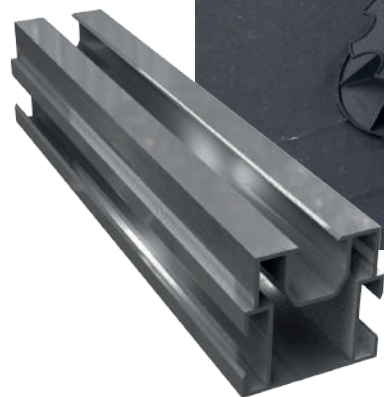

proud partner of

NOA
outdoor living

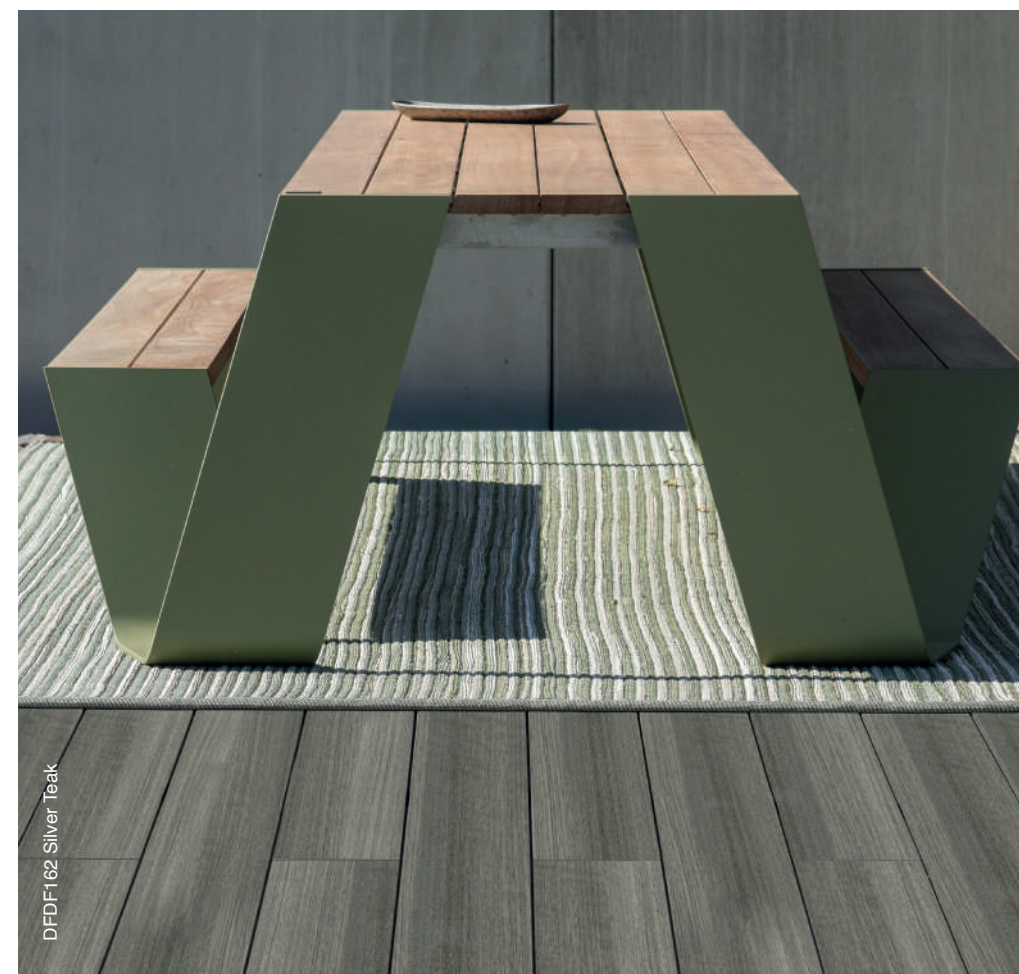

ecologically responsible

The decking boards are made from raw material to finished product at 1 production site in Belgium. Waste can be reused for production.

Duofuse® consists of 50% wood from sustainable forestry in Europe. This is guaranteed by PEFC certification.

The plastic part is PVC. Why PVC? This is a very strong plastic which, unlike many other materials, can be reused up to 10 times in combination with a long lifespan.

warranty

Plastivan nv offers a warranty on Duofuse® decking. The guarantee conditions are based on current knowledge and correct use of the product.

25 year warranty:


For residential use.
DFD/DFDE/DFDS162
DFDE140

10 year warranty:

For commercial use.
DFDF162
Accessories
Finishing
Support beams



warranty experience

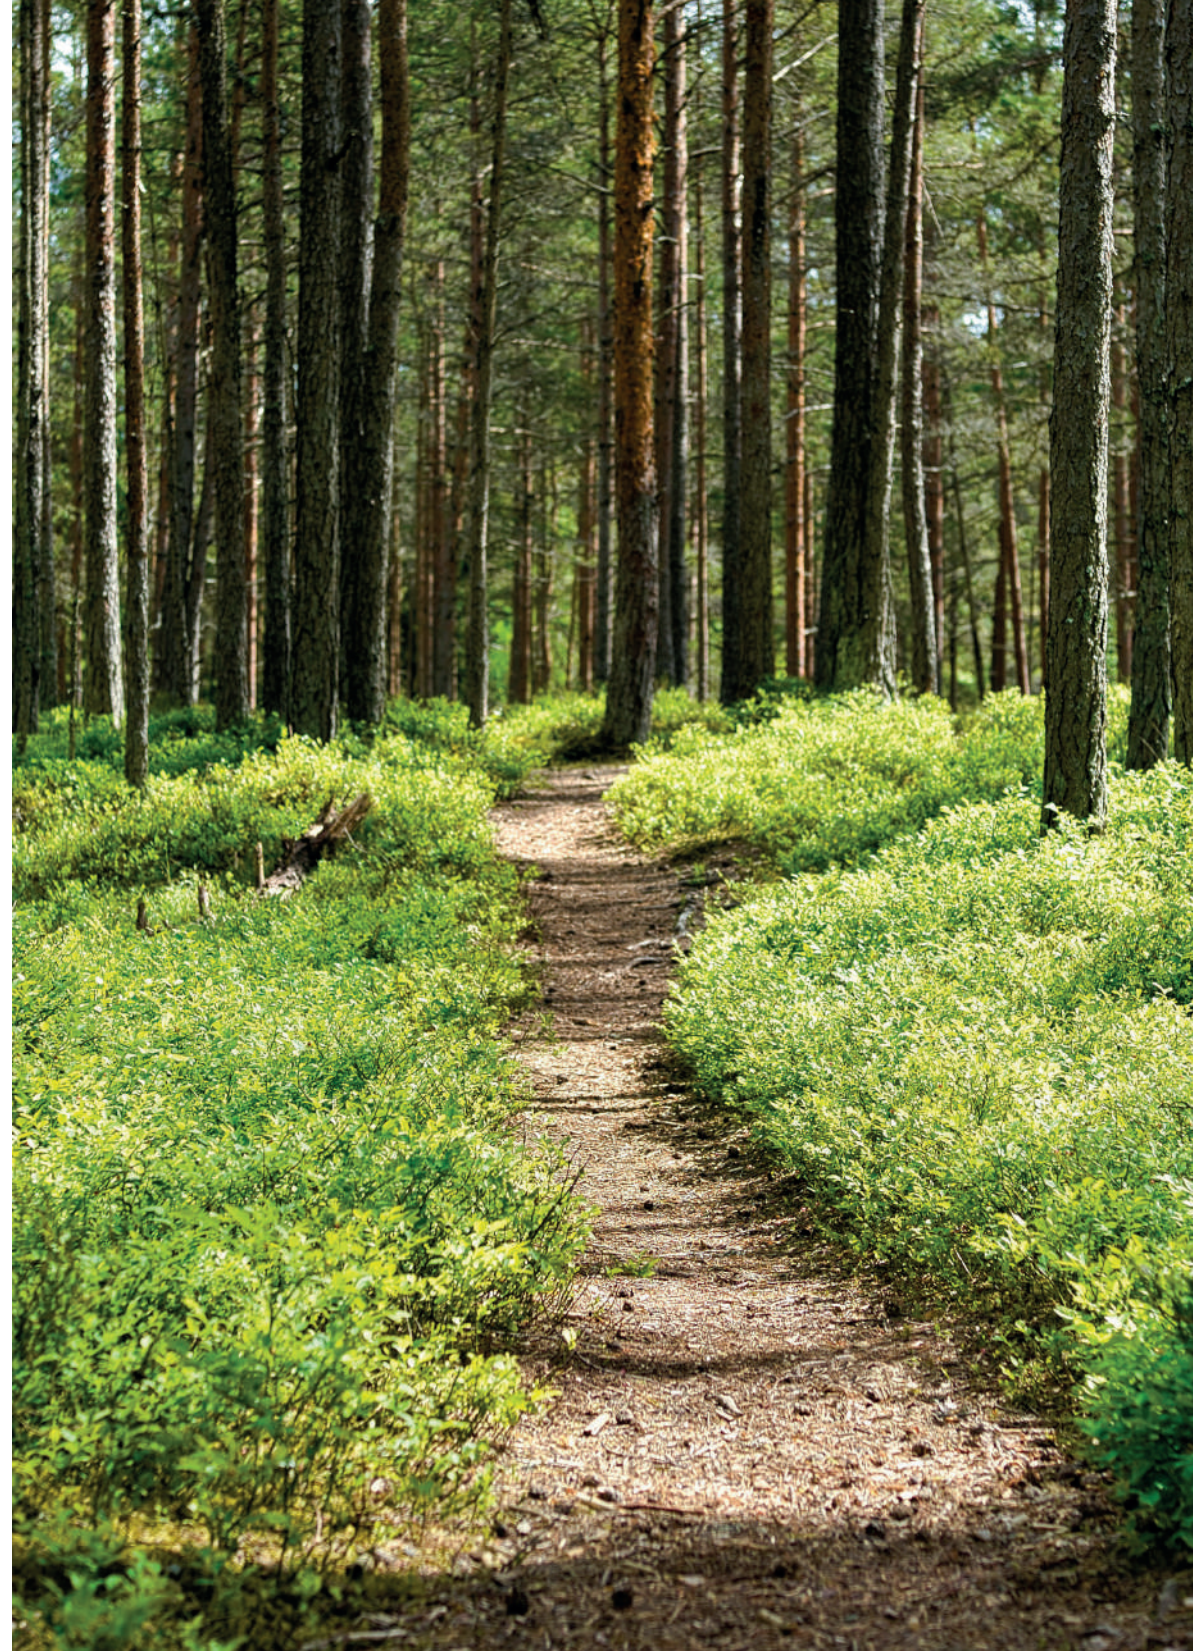

wood composite

Duofuse® wood composite is composed of a mix of wood flour and plastic. This gives it the warm appearance of wood combined with the low-maintenance advantages of plastic.

Duofuse® wood composite is made from raw material to finished product at a single production site in Belgium.

maintenance

Duofuse® wood composite is virtually maintenance-free and protective products are completely unnecessary. For normal maintenance, a brush or high-pressure cleaner can be used (max. 80 bar).

Cleaning instructions are available on the website

social and sustainable

Plastivan pursues a sustainable and social policy which is underlined by the Ecovadis label.

made in Belgium

colour change

After a few days, the product will begin to discolour slightly. This is a temporary and natural process that returns to the original colour after the lignin substance has run off. Sun and rain wash away the lignin, returning the original colour after a few weeks/months.



DFD162 Wenge Brown



Θεσσαλονίκη

Διευθ.

Εθν. Αντιστάσεως 72-
Καλαμαριά

Τηλ. επικ.

30 2310 412244

email

showroom@iwood.gr

Αθήνα

Διευθ.

Λεωφ. Κηφισίας 163-
Μαρούσι

Τηλ. επικ.

30 2168 092403

email

marousi@iwood.gr

 www.iwood.gr

 [iwood.gr](https://www.instagram.com/iwood.gr)

 [Iwood](https://www.facebook.com/iwood)

duofuse®

Enjoy your outdoor space thanks to
the premium decking and fencing
solutions of Duofuse.

duofuse.com